





# Eco-Seam<sup>TM</sup>



## CLIPLESS STANDING SEAM PANEL

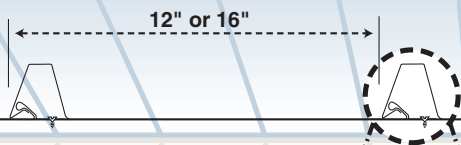

Installation is accomplished by hooking the panel into the previous panel and fastening with mechanical fasteners through pre-punched holes to allow for expansion and contraction. The fasteners will be covered by the adjacent panel. This positive locking action makes it virtually impossible for the panels to slip apart.



For new construction or renovation, Eco-Seam is a popular choice for mansards and mansard-type roofs. Lightweight and easy to install, Eco-Seam panels are an attractive alternative to other building materials. Environmentally friendly, weather and fire resistance and low-maintenance features are positive reasons for selecting Eco-Seam.

- ONE-PIECE STANDING SEAM PANEL
- POSITIVE LOCKING FEATURE
- NO EXTRA CAPS, STRIPS OR CLIPS NEEDED
- NO UNSIGHTLY FASTENERS
- 12" OR 16" WIDTH
- MAXIMUM RECOMMENDED LENGTH - 20'
- THE "SEAM" IS 1-1/4" HIGH AND 1/2" WIDE
- .032 ALUMINUM OR 24 GA. STEEL
- KYNAR 500® OR HYLAR 5000® BASED FINISH
- 29 STANDARD COLORS
- UL580 TESTED - CLASS 90 RATED

ATAS International, Inc.  
[www.atas.com](http://www.atas.com) • email: [info@atas.com](mailto:info@atas.com)

6612 Snowdrift Rd. • Allentown, PA 18106  
Ph: (610) 395-8445 • 800-468-1441  
Fax: (610) 395-9342

419 East Juanita Avenue • Mesa, AZ 85204  
Ph: 480-558-7210  
Fax: 480-558-7217

1610 Mustang Drive  
Maryville, TN 37801  
800-468-1441

