




SNAP-ON-SEAM

- Classic snap-on-seam two-component design
- 1" nominal seam height using a 1" seam cover
- Allows for easy removal of individual panels for repairs
- Concealed clip allows for unlimited thermal movement
- Panel can be curved to a minimum 5'-0" radius
- Must be installed over a solid substrate
- Panels can be tapered (without stiffening beads & shadowlines)
- Easy to install
- .032" and .040" aluminum and 24 gauge and 22 gauge steel are available
- Shadowlines & stiffening beads available

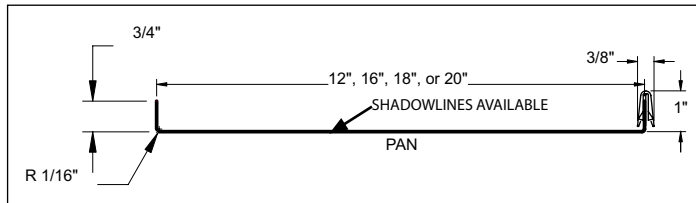

TECHNICAL DATA

Wind Uplift

ASTM E1592

24 ga allowable load
of 59.39 @ 1'-3"

24 ga allowable load
of 42.42 @ 2'-6"

Minimum Roof Slope

3:12

Available Widths

12", 16", 18" and 20"

Standard Lengths

Panels

6' to 47'

Battens

6' to 30'