


SEAM-LOC 24®

CONDENSED
TECHNICAL
REFERENCE

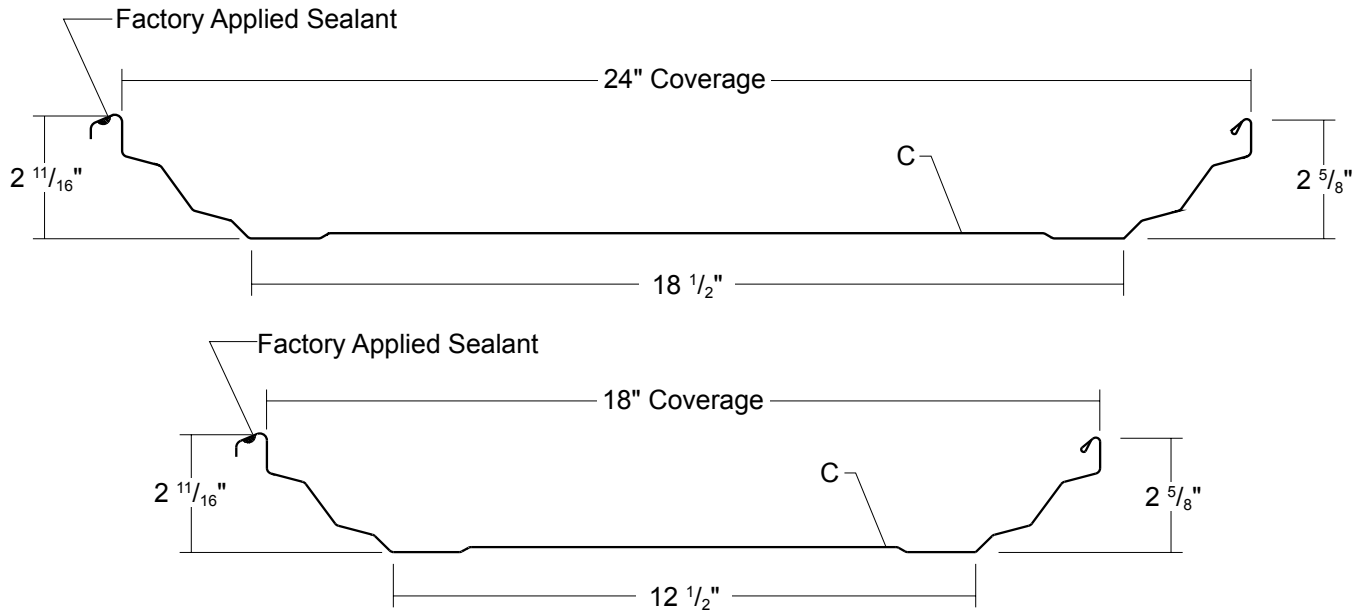

COMMERCIAL
INDUSTRIAL
PANEL

CONCEALED
FASTENERS

24" OR 18"
COVERAGE

MINIMUM
1/4:12 SLOPE


OPEN FRAMING OR
SOLID SUBSTRATE

PANEL OVERVIEW

- ▶ Finishes: PVDF (Kynar 500), and Acrylic Coated Galvalume®
- ▶ Gauges: 24ga standard, 22ga optional
- ▶ 24" or 18" panel coverage, 2 11/16" rib height
- ▶ Concealed clip designed to accommodate thermal movement
- ▶ Accommodates 1/2" to 6" blanket insulation
- ▶ Panels can be factory notched and punched
- ▶ Pittsburgh double flat locking mechanically seamed side lap
- ▶ Factory applied side lap sealant on panel and clip
- ▶ Applies over open framing or solid substrate
- ▶ Structural trapezoidal standing seam panel

TESTING

- ▶ UL 263 Fire Resistance Rating
- ▶ ASTM E 1680 Air Infiltration
- ▶ ASTM E 1646 Water Penetration
- ▶ Florida Building Code Approved 10999.3, 10999.4, 10999.5, 10999.6
- ▶ UL 2218 Class 4 Impact Rating.
- ▶ UL 790 Class A Fire Resistance Rating
- ▶ UL 580 Class 90 Wind Uplift, Construction Number 197, 197A
- ▶ ASTM E 1592 Wind Uplift
- ▶ Factory Mutual Approved Class 1-90, 1-165

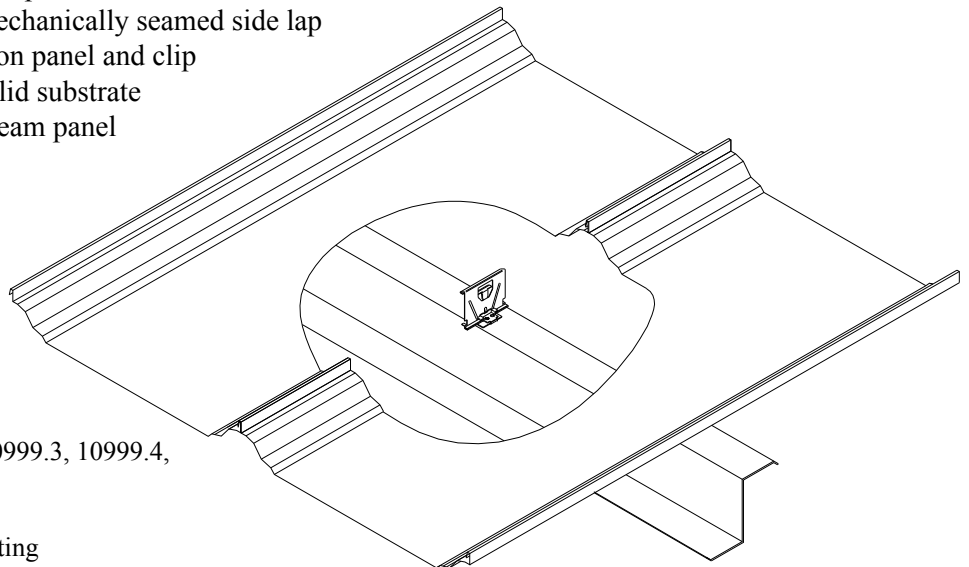


ms metal sales
manufacturing corporation


SEAM-LOC 24®

CONDENSED TECHNICAL REFERENCE

ATTACHMENT DETAILS

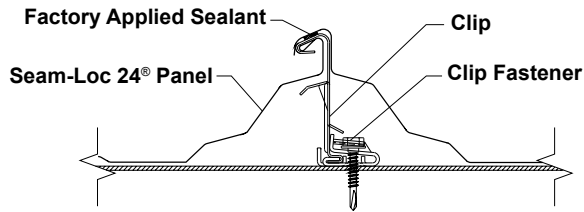


BEFORE SEAMING

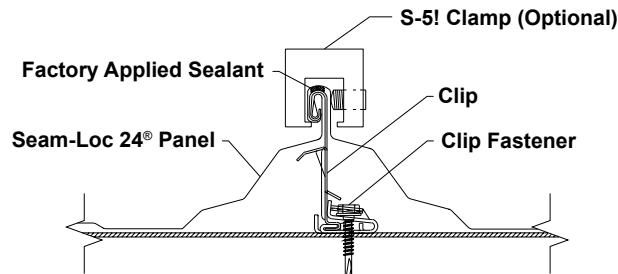

AFTER SEAMING

PANEL CLIP

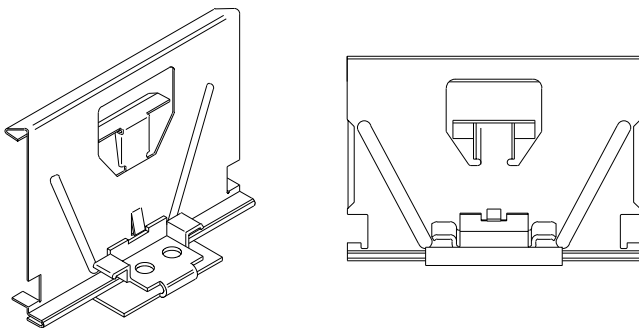

GENERAL INFORMATION

► Slope

The minimum recommended slope for the Seam-Loc 24® roof panel is 1/4:12.

► Substructure

Seam-Loc 24® is designed to be utilized over open structural framing or a solid substrate.

► Clips

Clip spacing is based upon the spacing of structural framing members and loading requirements.

► Coverage

Seam-Loc 24® panels are available in a 2^{11/16}" seam height with a 24" or 18" width coverage.

► Length

Minimum factory cut length is 5'-0". Maximum recommended panel length is 45'-0". Longer panels require additional consideration in packaging, shipping, and erection. Please consult Metal Sales for recommendations.

► Fasteners

The fastener selection guide should be consulted for choosing the proper fastener for specific applications. Quantity and type of fastener must meet necessary loading and code requirements.

NOTE: All panels are subject to surface distortion due to improperly applied fasteners. Overdriven fasteners will cause stress and induce oil canning across the face of the panel at or near the point of attachment.

► Availability

Finishes: Acrylic Coated Galvalume® and PVDF (Kynar 500).

Gauges: 24ga and 22ga

SECTION PROPERTIES

ALLOWABLE UNIFORM LIVE LOADS PSF (3 or More Equal Spans)

Ga.	Width (in.)	Yield KSI	Weight PSF	Top in Compression		Bottom in Compression		Inward (Gravity / Deflection) Load					Outward Uplift (Stress) Load						
				Ixx In ⁴ /ft	Sxx In ³ /ft	Ixx In ⁴ /ft	Sxx In ³ /ft	2'	3'	3.5'	4'	4.5'	5'	2'	3'	3.5'	4'	4.5'	5'
24	24"	50	1.09	0.2055	0.0952	0.0920	0.0653	342	161	120	93	74	60	70	59	54	49	43	38
24*	24"	50	1.09	0.2055	0.0952	0.0920	0.0653	342	161	120	93	74	60	131	105	92	79	66	54
24	18"	50	1.15	0.2480	0.1221	0.1220	0.0869	455	214	160	123	98	80	93	78	70	62	54	46
24*	18"	50	1.15	0.2480	0.1221	0.1220	0.0869	455	214	160	123	98	80	169	134	117	100	83	66
22	24"	50	1.43	0.2725	0.1263	0.1280	0.0882	458	217	161	125	99	81	74	64	59	54	49	44

- Theoretical section properties have been calculated per AISI 2007 "Specification for the Design of Cold-formed Steel Structural Members." Ixx and Sxx are effective section properties for deflection and bending.
- Allowable load is calculated in accordance with AISI 2007 specifications considering bending, shear, combined bending and shear, deflection, and ASTM E-1592 testing and fastener pullout from 16 ga. supports. Allowable load considers the worst case of 3 and 4 equal span conditions. Allowable load does not address web crippling. Panel weight is not considered.
- Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
- Allowable loads do not include a 1/3 stress increase in uplift.

* Loads determined using the S-5! Clamp at each panel clip.

metal sales
manufacturing corporation



Kent, WA 800.431.3470
Temple, TX 800.543.4415
Longmont, CO 800.289.7663
Antioch, TN 800.251.8508
Woodland, CA 800.759.6019
Rogers, MN 800.3289316
Spokane, WA 800.572.6565

Jefferson, OH 800.321.5833
Rock Island, IL 800.747.1206
Sellersburg, IN 800.999.7777
Jacksonville, FL 800.394.4419
Orwigsburg, PA 800.544.2577
Independence, MO 800.747.0012
Fontana, CA 800.782.7953

Anchorage, AK 866.640.7663
Bay City, MI 888.777.7640
Detroit Lakes, MN 888.594.1394
Mocksville, NC 800.228.6119
Fort Smith, AR 877.452.3915

www.metalsales.us.com