

REDI-ROOF STANDING SEAM

PRODUCT FEATURES

- Available with or without offsets
- Factory eave notching available
- Herr-Voss corrective leveled
- Labor-saving one-piece design
- Stiffener beads available
- 20 year non-prorated finish warranty
- Maximum panel length of 45 feet

MATERIAL

- 37 stocked colors (24 gauge steel)
- 36 stocked colors (.032 aluminum)
- Smooth and stucco embossed available
- Galvalume Plus available


UL CLASSIFICATION

- UL-580 Class 90 wind uplift (steel & copper only - copper up to 12" O.C. only)
- UL-790 Class A fire rated
- UL-263 fire resistance rated
- UL-2218 impact resistance rated
- UL-90 rated copper panel up to 12" O.C.



ASTM TESTS

- ASTM E283/1680 tested
- ASTM E331/1646 tested

*24 ga. steel panels in all O.C.'s and 16 oz copper in 12" O.C. for Redi-Roof Standing Seam are UL-90 Classified over solid substrate. See roof deck construction in Underwriter Laboratories roofing materials and systems directory.

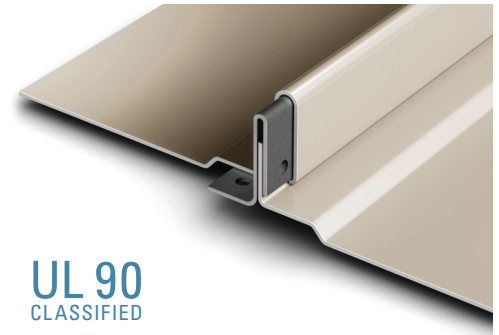

UL 90
CLASSIFIED

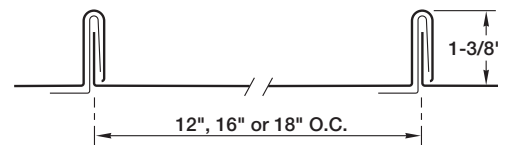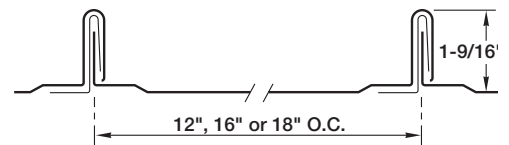

SPECS: 12", 16" OR 18" O.C.
1-9/16" HIGH
1-3/8" HIGH

