



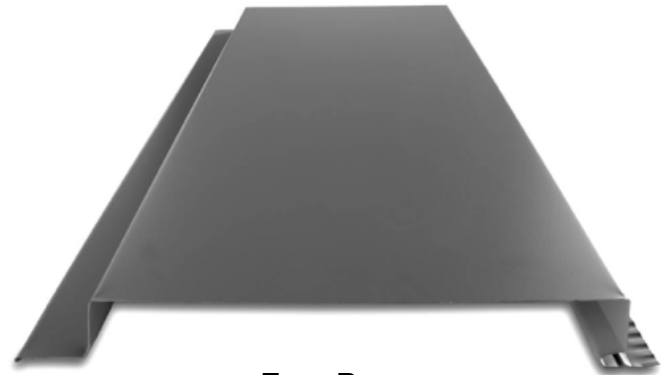


SmoothWall™ will give your commercial or residential project a clean monolithic appearance. These panels are a perfect fit to be used on walls, soffits and fascia. With the 4 different panel styles available, your designs will come alive.

KEY FEATURES

- 12" and 12½" coverage options
- 26, 24 & 22 gauge Tru-Gauge™, .032 Aluminum and 24 gauge Bonderized (G-90)
- 16 & 20 oz. Copper *please inquire*
- Custom lengths 2' to 35' (*inquire on longer lengths*)
- Concealed fasteners: fasteners cannot leak
- 17 sq inch free air flow per lineal foot of perforated panel
- Pre-slotted fastener flange: allows expansion/contraction of panel
- ASTM E283, ASTM E330, ASTM E331
- UL Class A fire rated
- Versatile in wall and soffit applications
- Pan options: Flat pan, Single Bead, Double Bead and Perforated
- "Oil canning" is an inherent characteristic of roof and wall products, and not a defect, which is not a cause for panel rejection

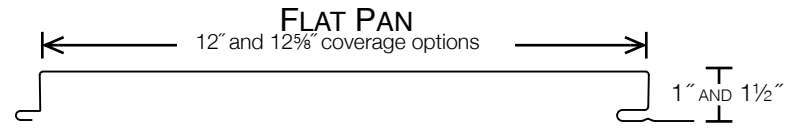

FLAT PAN

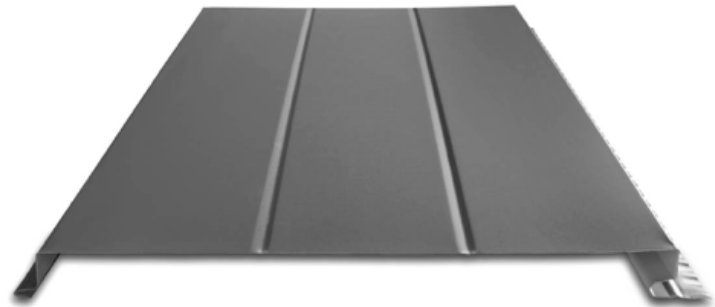

DOUBLE BEAD or SINGLE BEAD available




MATERIAL SPECIFICATIONS

- 26 gauge Kynar 500® Painted Steel .019" (thickness prior to painting) G-90 Galvanized or AZ-50
- 22 & 24 gauge Kynar 500® Painted Steel .0236" (thickness prior to painting) G-90 Galvanized or AZ-50
- 22 & 24 gauge bare Zinalume® Plus with Clear Acrylic Coating
- ▲ 22 gauge Kynar 500® Painted Steel .029" (thickness prior to painting) G-90 Galvanized or AZ-50
- .032 Kynar 500® Painted Aluminum
- 24 gauge Bonderized (G-90)
- 16 and 20 oz. Copper
- 22 gauge Rusteel™ (cold-rolled)
- 22 gauge Rusteel Plus™ (A-606)
- Kynar® and substrate testing data available
(See website)


KEY FEATURES

- 20 Standard Colors, 5 Metallic Colors and 5 Specialized Colors
- Kynar 500® Paint System-the ultimate in exterior durability and color retention
- "Cool" color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two-coat, 70% resin finish, applied at a 1 mil. thickness
- 40-year residential paint warranty
- 20 and 30 year commercial paint warranty:
(Contact TMP for warranty specifications)

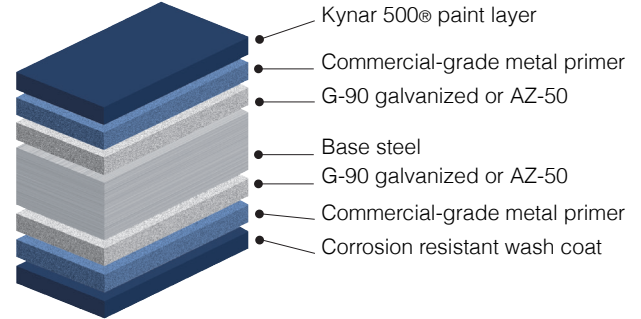


40-Year Residential/ 20 and 30 Year Commercial Manufacturer's Limited Warranty


STANDARD 24g COOL KYNAR 500® COLORS

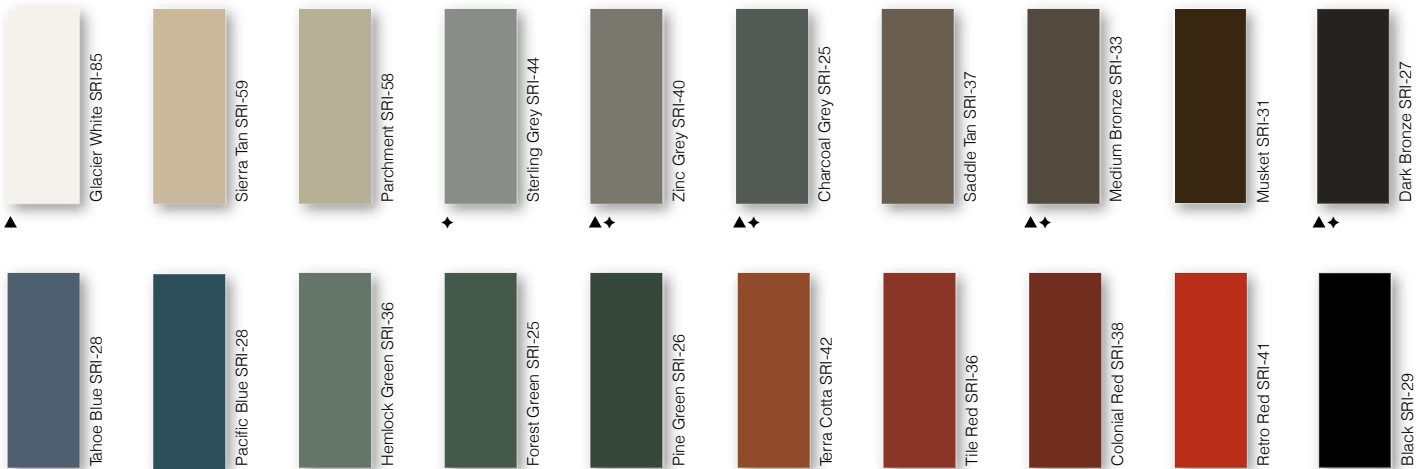

PREMIUM METALLIC COOL KYNAR 500® COLORS

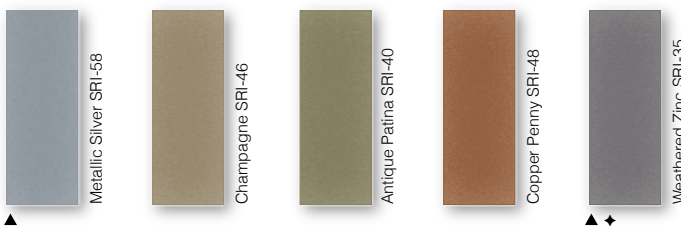

SPECIALIZED MATERIAL

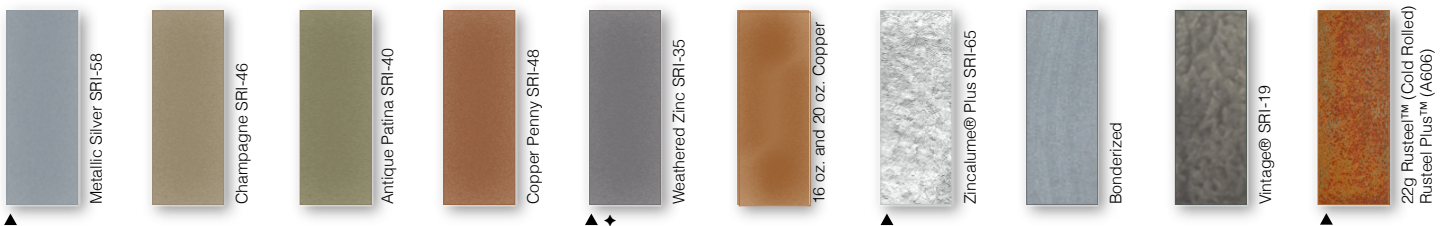

These printed chips provide a close representation of the colors. Metal samples are available upon request. Coatings are low gloss 10-15% sheen. "Oil canning" is an inherent characteristic of Roof & Wall products, not a defect, and it not a cause for panel rejection. SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1980 and are based on actual testing.

Standard Panels Weights			
Gauge	Color	LBS SQFT	LBS LF
26	Kynar	1.09	1.09
24	Kynar	1.28	1.28
22	▲	1.61	1.61
.032 Alum	◆	.60	.60