

7.2 Panel

Description:

7.2 Panel is a commercial or industrial exposed fastener panel. This panel offers versatility and functionality for roofs and walls. The symmetrical rib 7.2 Panel offers excellent spanning and cantilever capabilities, making it an excellent choice for carports and walkway canopies.

Materials & Thickness:

- ▶ Galvanized & Galvalume 29-20ga
Unpainted / Kynar500® Hylar5000® / SColor

Method of Application:


7.2 Panel may be installed in a non-sequential pattern over a solid substrate or open framing.

Precautions:

1. Oil canning is not a cause for rejection.
2. Exercise caution when lifting, moving, transporting, storing or handling metal to avoid possible physical damage.

Accessories:

We offer a full line of accessories that compliment this profile.

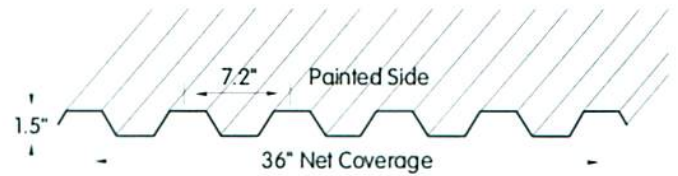

PRODUCT DATA	
Panel Type:	Commercial / Industrial / Architectural
Panel Interlock:	Over Lapping
Tapered Panels:	No
Radiused:	No
Standard Panel Surface:	Smooth
Optional Panel Surface:	No
Substrate:	Solid Substrate or Open Framing
Minimum Recommended Slope:	1/2:12

PANEL SIZE	
Panel Coverage Width:	36"
Min. Panel Length:	48"
Max. Panel Length:	600"