

# Corrugated Panel

## Description:

The Corrugated metal wall panel is ideal for a variety of market places, including residential, light commercial, agricultural and storage facilities. The Corrugated metal wall panel can be used in both vertical and horizontal applications.

## Materials & Thickness:

- ▶ Galvanized & Galvalume 29-22ga  
Unpainted / Kynar500® Hylar5000®
- ▶ Aluminum .032", .040"  
Unpainted / Anodized / Kynar500® Hylar5000®
- ▶ Copper 16 & 20oz
- ▶ Rheinzink
- ▶ Weathering Steel 24ga

## Method of Application:


2.5 Corrugated Panel may be installed in a non-sequential pattern over a solid substrate or open framing.

## Precautions:

1. Oil canning is not a cause for rejection.
2. Exercise caution when lifting, moving, transporting, storing or handling metal to avoid possible physical damage.

## Accessories:

We offer a full line of accessories that compliment this profile.

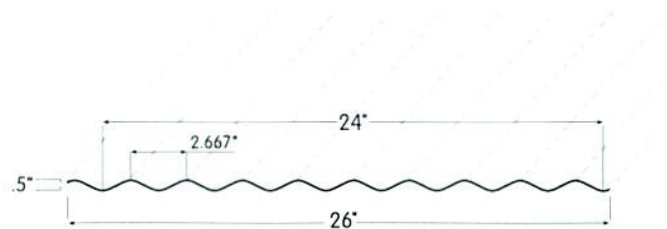

PRODUCT DATA	
Panel Type:	Commercial / Industrial / Architectural
Panel Interlock:	Over Lapping
Tapered Panels:	No
Radiused:	No
Standard Panel Surface:	Smooth
Optional Panel Surface:	Embossed - Perforated
Substrate:	Solid Substrate or Open Framing
Minimum Recommended Slope:	2:12

PANEL SIZE	
Panel Face Width:	26"
Min. Panel Length:	24"
Max. Panel Length:	480"