


PBR Panel

Description:

PBR Roofing Panel is a factory formed corrugated commercial-industrial metal roof and wall panel that provides a traditional metal panel appearance. The PBR roofing panel is mechanically fastened with exposed fasteners and can be installed in a non-sequential pattern. The panel is available in a wide variety of materials and finishes including SColor, Kynar 500® Hylar 5000® pre-finished G-90 Galvanized Steel and Aluminum, Copper, Anodized and Mill Finish Aluminum, and Galvalume.

PBR is the #1 choice panel for Commercial and Industrial Applications.

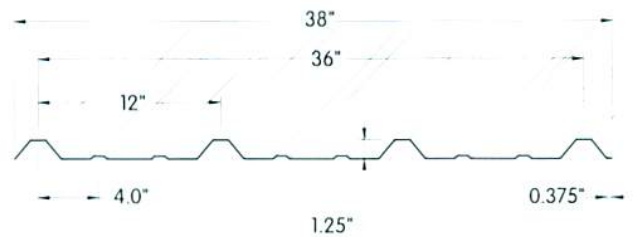

Materials & Thickness:

- ▶ Galvanized & Galvalume 29-22ga
Unpainted / Kynar500® Hylar5000® / SColor
- ▶ Aluminum .040\" - .050\"
Unpainted / Anodized / Kynar500® Hylar5000®
- ▶ Weathering Steel

Method of Application:

1. PBR panels may be installed in a non-sequential pattern over a solid substrate or open framing

Precautions:

1. Oil canning is not a cause for rejection
2. Exercise caution when lifting, moving, transporting, storing or handling metal to avoid possible physical damage

Accessories:

We offer a full line of accessories that compliment this profile

PRODUCT DATA	
Panel Type:	Commercial / Industrial / Architectural
Panel Interlock:	Over Lapping
Tapered Panels:	No
Radiused:	No
Standard Panel Surface:	Smooth
Optional Panel Surface:	No
Substrate:	Solid Substrate or Open Framing
Minimum Recommended Slope:	1/2:12

PANEL SIZE	
Panel Coverage Width:	36"
Min. Panel Length:	48"
Max. Panel Length:	600"