


Shadeguard™

Description:

The Shadeguard panel system is an exposed fastened offering that can be used for both roof and wall applications. The coverage width of Shadeguard is 36 inches. Shadeguard is ideal for agricultural, light commercial, residential and storage buildings. It also works well for canopies.

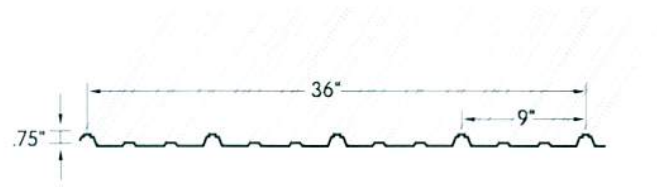

Materials & Thickness:

- ▶ Galvanized & Galvalume 29-22ga
Unpainted / Kynar500® Hylar5000®/ SColor

Method of Application:

1. Oil canning is not a cause for rejection.
2. Exercise caution when lifting, moving, transporting, storing or handling metal to avoid possible physical damage.

Accessories:

We offer a full line of accessories that compliment this profile.

PRODUCT DATA	
Panel Type:	Commercial / Architectural / Residential
Panel Interlock:	Over Lapping / Nestable
Tapered Panels:	No
Radiused:	No
Standard Panel Surface:	Smooth
Optional Panel Surface:	No
Substrate:	Solid Substrate or Open Framing
Minimum Recommended Slope:	3:12

PANEL SIZE	
Panel Coverage Width:	36"
Min. Panel Length:	48"
Max. Panel Length:	600"